

# LATERAL LIFTING CLAMP (HLC-H)

**TWO-YEAR WARRANTY**

## TECHNICAL SHEET


Clamp for lateral (horizontal) lifting of steel plates and structural steels (H, I, T and L shaped steel structures).

- The spring-loaded tightening lock mechanism assures a positive initial clamping force.
- The clamping force increases in proportion to the weight of the load.
- The handle makes it easy and safe to set and detach the clamp onto and from the work piece.
- The main body is made from the die-forging of special alloy steels in one piece, which is optimally tempered for maximum strength and durability.
- High-frequency quenching of special alloy steels gives greater durability to the cam.
- The main body is a baked-on finished.



## TECHNICAL SPECS

MODEL	Capacity (Tons)	Jaw opening (mm)	Weight (kg)
HLC1H	1	0~25	3,0
HLC2H	2	0~30	5,5
HLC3H	3	0~35	9,5
HLC6H	6	0~45	23,0

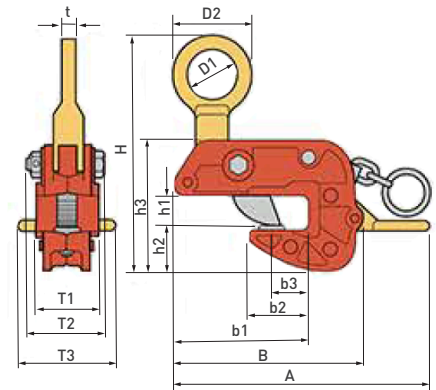

Capacity	H	h1	h2	h3	b1	b2	b3	A	B	D1	D2	t	T1	T2	T3
1	208	27	38	115	122	56	34	229	173	40	65	12	49	65	86
2	246	32	48	140	143	65	40	273	203	50	80	16	61	80	104
3	292	37	58	168	162	74	45	307	237	60	100	18	75	93	104
6	385	47	81	222	212	90	55	380	312	80	140	22	102	118	134

## EXAMPLES OF USE

